





## UNO PICO-ID ISO TRANSPONDER

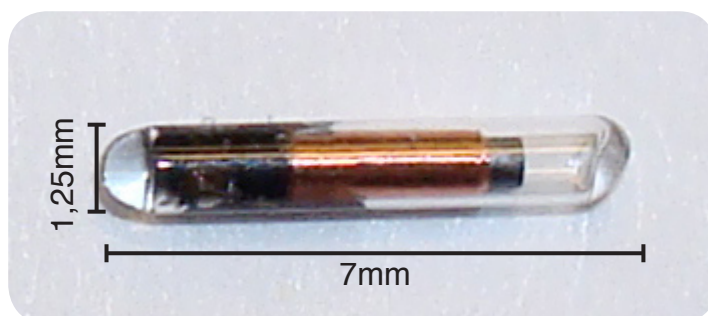

### TECHNICAL SPECIFICATIONS:

**Length:** 7mm  
**Diameter:** 1,25mm

**INJECTION NEEDLE:** ONLY 1,6mm (< 16gauge)

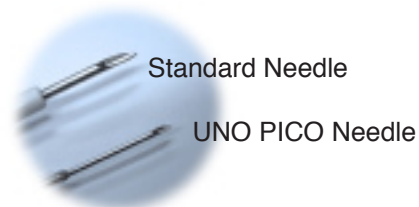

ISO Compliant: ISO standard 11784  
Material: BIO GLASS 8625  
Coating: Parylene  
IC Type: EM4205  
Operating Frequency: 134 kHz +/- 6kHz

Chemical Resistance: Water immersion IP68 \* 20°C, 24h  
Salt water solutions \*20°C, 100h  
Oil, HLC (10%) Alcohol \* 20°C, 100h  
Ammoniac \* 20°C, 100h

Mechanical Resistance: Vibration test IEC 68.2.6  
Shock IEC 68.2.29

Temperature Resistance: Storage: -40°C to +90°C  
Operating: -40°C to +85°C

ICAR APPROVED.

### UNO Roestvaststaal BV

- Phone: +31 316 524451 - Fax: +31 316 523785 - Email: Info@unobv.com - www.unobv.com